

APRON SECTION

CONSIDERATIONS:

PIECE SIZE


- KEEP APRON AND SPLASH LENGTHS FROM GETTING TOO LONG WHERE BREAKAGE IN FABRICATION, SHIPPING, AND INSTALLATION BECOME A PROBLEM.

JOINT SIZE

- CHECK BID QUALIFICATIONS
- TIGHT JOINTS, 1/16" JOINTS, 1/8" JOINTS (PREFERRED), 1/4" JOINTS.

FRONT EDGE OF VANITY

- FOLLOW CONTRACT DOCUMENTS
- STANDARD BLUNT EDGE, RADIUS EDGE, AND BEVELED EDGE.

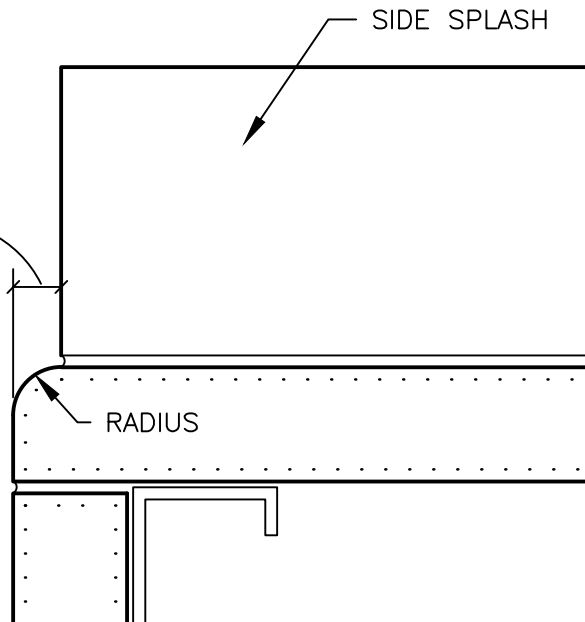

HOLD SIDE SPLASH LENGTH BACK FROM FRONT EDGE OF VANITY TOP. SIDE SPLASH DOES NOT NEED TO FOLLOW VANITY PROFILE.

SIDE SPLASH/FRONT EDGE OF VANITY

DESCRIPTION:

VANITY APRON AND SIDE SPLASH

SCALE:

6" = 1'-0"

DRAWN BY:

LB

DATE:

9-1-09

COLD SPRING GRANITE
A better way...
 17482 GRANITE WEST ROAD, COLD SPRING, MN 56320-4578
 PHONE (320) 685-3621, FAX (320) 685-8490
 WWW.COLDSPRINGGRANITE.COM